

Slotted Track

FEATURES & BENEFITS

- Fire-rated deflection system
- Standard Slotted Track allows up to 1" of vertical movement
- Custom shapes and slot sizes available
- UL Classified in over 80 approved fire rated systems
- Provides positive attachment for wall strength
- Absorbs head-of-wall and floor extension or compression movement
- Available in custom widths and thicknesses
- Integrated with traditional wall systems
- Easy installation reducing labor costs

PRODUCT APPLICATION


SCAFCO Slotted Track is the industry preferred system for achieving head of wall deflection and fire rating for interior and exterior walls. SCAFCO slotted track has met the movement and cycling requirements of ANSI/UL 2079, and is UL classified for 1, 2, 3 & 4 Hour fire ratings in head of wall fire-rated joint systems. Details & information of each individual system can be found in the XHBN section of Volume 2 of the UL Fire Resistance Directory, or can be downloaded from www.SCAFCO.com.




MATERIAL COMPOSITION

ASTM: A 653 / A 653M
 Yield Strength: 30, 33, 43 mil: 33 ksi
 54, 68, 97 mil: 50 ksi
 Galvanized Coating: 33,43,54 mil; G60
 Hot Dipped Galvanized
 68,97 mil; G90 Hot Dipped Galvanized

Deflection Track

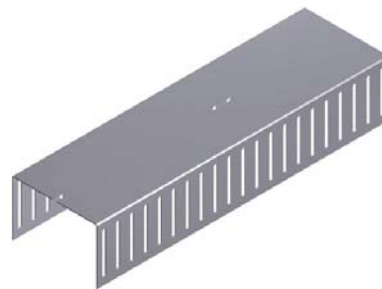


Slotted Deep Leg Track

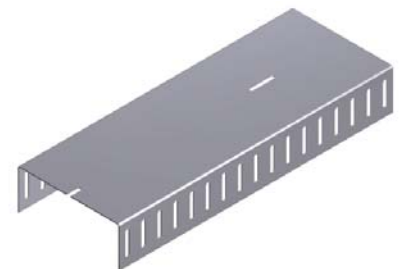


Standard Slotted Track



Slotted Angle



Pitched Slotted Track


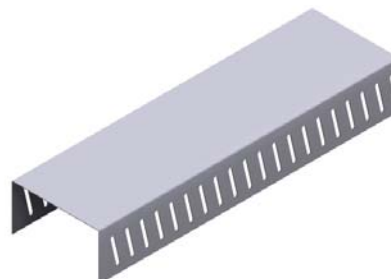


Slotted Pitch Track



Slotted Curved Track

Slotted Track

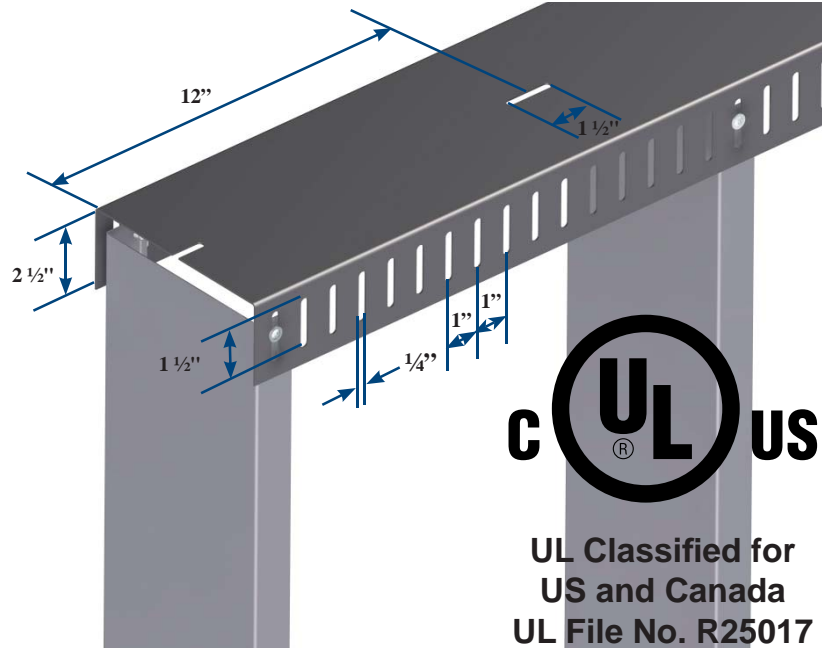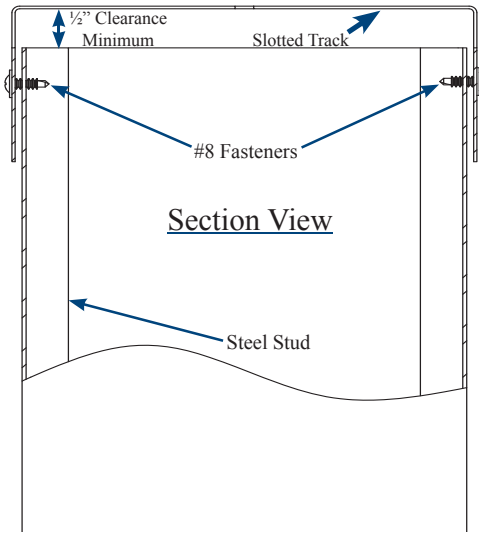

ORDER INFORMATION

Part Number	Mils	Gauge	Design Thickness	Web Width
250SLT250-30-10	30	20	0.0312	2 1/2"
250SLT250-33-10	33	20	0.0346	2 1/2"
250SLT250-43-10	43	18	0.0451	2 1/2"
250SLT250-54-10	54	16	0.0566	2 1/2"
250SLT250-68-10	68	14	0.0713	2 1/2"
250SLT250-97-10	97	12	0.1017	2 1/2"
350SLT250-30-10	30	20	0.0312	3 1/2"
350SLT250-33-10	33	20	0.0346	3 1/2"
350SLT250-43-10	43	18	0.0451	3 1/2"
350SLT250-54-10	54	16	0.0566	3 1/2"
350SLT250-68-10	68	14	0.0713	3 1/2"
350SLT250-97-10	97	12	0.1017	3 1/2"
362SLT250-30-10	30	20	0.0312	3 5/8"
362SLT250-33-10	33	20	0.0346	3 5/8"
362SLT250-43-10	43	18	0.0451	3 5/8"
362SLT250-54-10	54	16	0.0566	3 5/8"
362SLT250-68-10	68	14	0.0713	3 5/8"
362SLT250-97-10	97	12	0.1017	3 5/8"

Part Number	Mils	Gauge	Design Thickness	Web Width
400SLT250-30-10	30	20	0.0312	4"
400SLT250-33-10	33	20	0.0346	4"
400SLT250-43-10	43	18	0.0451	4"
400SLT250-54-10	54	16	0.0566	4"
400SLT250-68-10	68	14	0.0713	4"
400SLT250-97-10	97	12	0.1017	4"
600SLT250-30-10	30	20	0.0312	6"
600SLT250-33-10	33	20	0.0346	6"
600SLT250-43-10	43	18	0.0451	6"
600SLT250-54-10	54	16	0.0566	6"
600SLT250-68-10	68	14	0.0713	6"
600SLT250-97-10	97	12	0.1017	6"
800SLT250-30-10	30	20	0.0312	8"
800SLT250-33-10	33	20	0.0346	8"
800SLT250-43-10	43	18	0.0451	8"
800SLT250-54-10	54	16	0.0566	8"
800SLT250-68-10	68	14	0.0713	8"
800SLT250-97-10	97	12	0.1017	8"

UL Head of Wall Joint Systems Numbers

HW-D-0003	HW-D-0076	HW-D-0170	HW-D-0241	HW-D-0275	HW-D-0016	HW-D-0077	HW-D-0173
HW-D-0242	HW-D-0277	HW-D-0020	HW-D-0082	HW-D-0183	HW-D-0243	HW-D-0278	HW-D-0021
HW-D-0083	HW-D-0184	HW-D-0246	HW-D-0293	HW-D-0024	HW-D-0084	HW-D-0185	HW-D-0259
HW-D-0313	HW-D-0025	HW-D-0085	HW-D-0186	HW-D-0260	HW-D-0322	HW-D-0029	HW-D-0087
HW-D-0190	HW-D-0263	HW-D-0341	HW-D-0031	HW-D-0088	HW-D-0193	HW-D-0265	HW-D-0034
HW-D-0089	HW-D-0194	HW-D-0271	HW-D-0036	HW-D-0091	HW-D-0195	HW-D-0272	HW-D-0042
HW-D-0099	HW-D-0205	HW-D-0043	HW-D-0101	HW-D-0210	HW-D-0044	HW-D-0102	HW-D-0217
HW-D-0045	HW-D-0106	HW-D-0218	HW-D-0046	HW-D-0107	HW-D-0047	HW-D-0108	HW-D-0048
HW-D-0111	HW-D-0049	HW-D-0134	HW-D-0054	HW-D-0136	HW-D-0062	HW-D-0137	HW-D-0063
HW-D-0144	HW-D-0067	HW-D-0146	HW-D-0068	HW-D-0152	HW-D-0069	HW-D-0154	HW-D-0071
HW-D-0160	HW-D-0072	HW-D-0162	HW-D-0073	HW-D-0167			